

SMD TYPE CERAMIC CRYSTAL UNIT



NXPD Series 1.6 x 1.0

 FREE SAMPLES RoHS compliant ISO / Pb Free RoHS compliant Pb	Application : - Real Time Clock - Wireless communications
	Features : - Excellent heat resistance and environmental characteristics - RoHS compliant



Electrical Specification :


Model	NXPD
1. Frequency	
Frequency Range	32.768 KHz
Frequency Tolerance at 25°C±2°C	±20 ppm (TYP.)
Parabolic Curvature Constant	-0.045PPM±0.01/°C ² X CUT
2. Environmental Condition	
Operating Temp Range	-20°C~ +70°C or specify
Storage Temp Range	-55°C ~ +125°C
Aging Rate	±3ppm/year
3. Electrical Specifications	
Test Circuit	S&A 250B
Load Capacitance	12.5pF series or specify
Equivalent Series Resistance(ESR)	80K Ω max
Drive Level	0.1uW Typ. 0.5uW Max or specify
Shunt Capacitance	3.0pF max

* Above specification subject to change without prior notice, please consult our sales representative for more information*

SMD TYPE CERAMIC CRYSTAL UNIT



Dimensions (mm) :

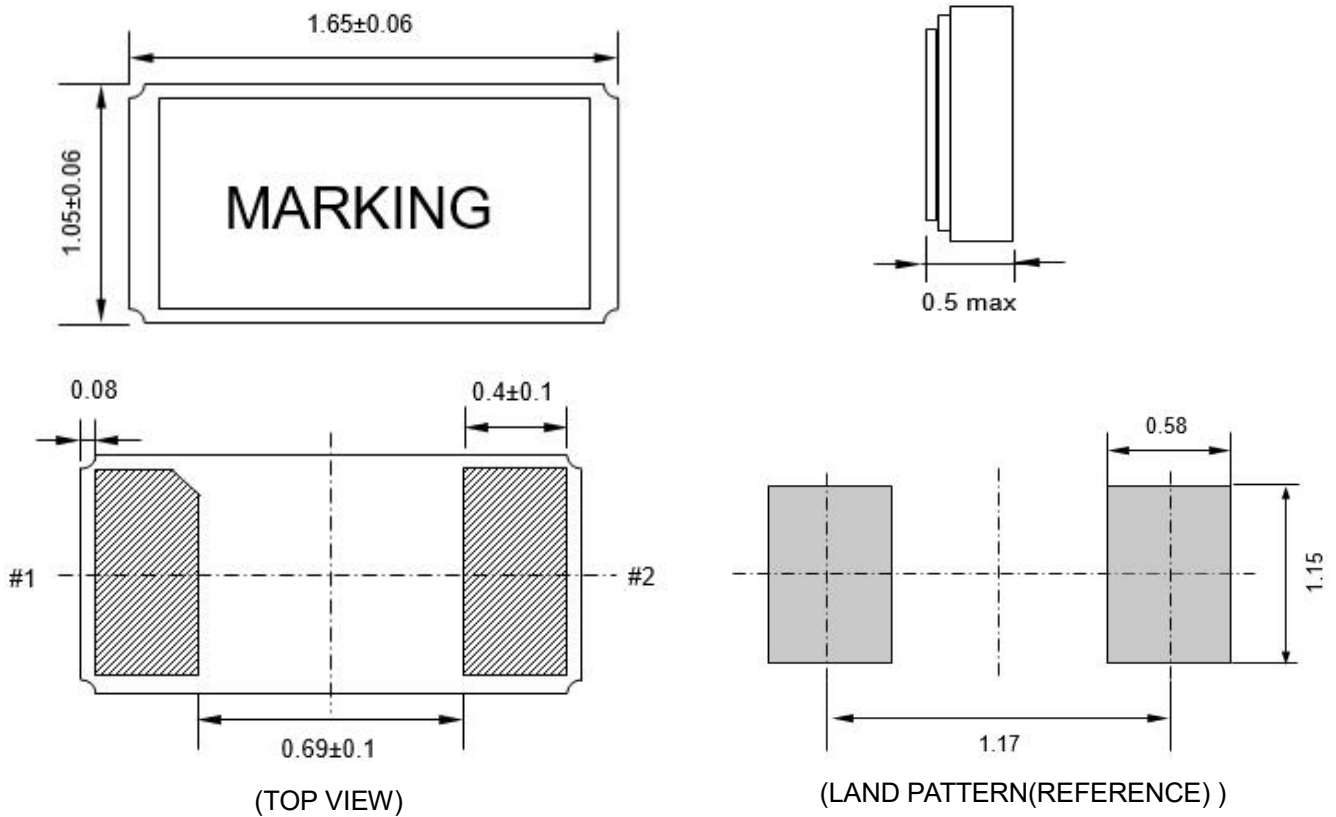

* Above specification subject to change without prior notice, please consult our sales representative for more information*